

LOADING DOCK




- **Widely used for warehouse and factory operations.**
- **Especially designed for palletized loads transported by manual pallet trucks or powered pallet trucks.**
- **Moving Heavy equipment either onto or off a vehicle in a level mode.**

STANDARD FEATURES

- Heavy-duty Platform
Made in welded resistant construction
The surface is made of nonskid tread plate
Braced with binding beams
- Strong Scissors
One piece construction scissor legs
- High-grade Hydraulic Cylinders
The piston rods are grinded and hard-chromium plated
- Compact power-control unit
The first level quality hydraulic power unit
All electric components in one cabin
- Simple Hand Controller
Operated by a hand-pushbutton for "Raise/Lower"
Any positions can be stopped when the button releases
- Safety Design
Water proof and 24 voltage hand-control unit
Lifting limited switch
Anti-explosion valve in case hydraulic pipe is broken

OPTIONAL FEATURES

- Capacity 1 ton to 6 tons Are Available
- Special Platform Size & Special Lifting Height Are Available
- Special Input Voltage Are Available
- More than One Scissor Are Available

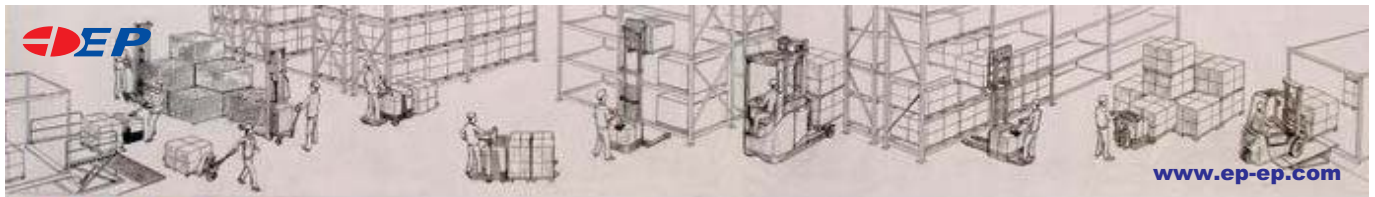

SPECIFICATION

Scissor no.	Model	Capacity (kg)	Platform Size L(mm)*W(mm)	Lowered Height (mm)	Travel (mm)	Raised Height (mm)	Motor (kw)	Weight (kg)
I	LD20-2515	2000	2500*1500	350	1600	1950	4	1200
	LD20-2520	2000	2500*2000	350	1600	1950	4	1400
	LD25-2515	2500	2500*1500	350	1600	1950	4	1400
	LD25-2520	2500	2500*2000	350	1600	1950	4	1500
	LD30-2515	3000	2500*1500	350	1600	1950	4	1400
	LD30-2520	3000	2500*2000	350	1600	1950	4	1500
	LD40-3020	4000	3000*2000	600	1650	2250	4	2450
	LD40-3520	4000	3500*2000	600	1800	2400	4	2680
	LD50-3020	5000	3000*2000	600	1650	2250	4	2450
	LD50-3520	5000	3500*2000	600	1800	2400	4	2680
	LD60-3020	6000	3000*2000	600	1650	2250	4	2450
	LD60-3520	6000	3500*2000	600	1800	2400	4	2680
II	LD10-3019	1000	3000*1900	850	3600	4450	4	2500
	LD45-4020	4500	4000*2000	800	4500	5300	5.5	2800
III	LD25-3020	2500	3000*2000	1080	4530	5610	4	2600
IV	LD18-2518	1800	2500*1800	1200	6000	7200	4	2200

*Special requirements can be customized.

